

165-12 | Scissor Lift

Working height

18.5m

Closed length	3.74m
Closed height	3.40m
Stowed height (guardrails lowered)	2.65m
Closed width	1.20m
Platform size	3.38m x 1.16m
Platform length (deck extended)	4.88m
Max SWL	500kg
Weight	7985kg


Alternative machines

LL15N
S175-12
180-12

Manufacturer

Holland Lift

Working envelope

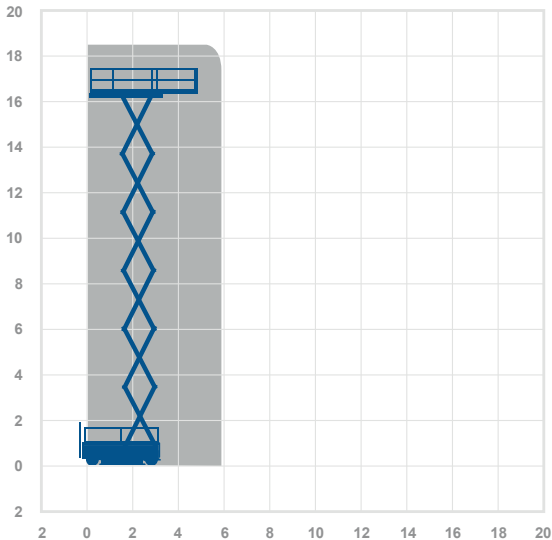

18.5m

Standard features



Optional extras



0345 745 0000

nationwideplatforms.co.uk

**Nationwide
Platforms**
A **LOXAM** Company

Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

Height and outreach

Working height Horizontal outreach

AMWP11.5-8100
Boom Lift

Working height	11.2m	Alternative machines
Horizontal outreach	3m	Star10
Closed length	2.03m	Star10A
Closed height	1.99m	Manufacturer
Closed width	1m	Dejg
Rotation	340°	
Platform height	0.2m	
Max SWL	200kg	
Weight	2000kg	
Deck size	0.62m x 0.876m	

Working envelope

Standard features:

Optional extras:

0345 745 0000
nationwideplatforms.co.uk
Nationwide Platforms
a LINEMAR Company

Standard features

- | | | | |
|--|--|---|--|
| <ul style="list-style-type: none"> Battery power Diesel power Lithium battery Hybrid power Dual fuel option Gas power option Rough terrain (2 wheel drive) Rough terrain (4 wheel drive) | <ul style="list-style-type: none"> IPAF licence type IPAF licence type IPAF licence type IPAF licence type IPAF licence type Tracked Mast boom Articulating boom | <ul style="list-style-type: none"> Straight telescopic boom Non-marking tyres Outrigger legs Maximum people in cage* Push around vehicles Operator powered Indoor use only Indoor/Outdoor | <ul style="list-style-type: none"> Self drive J1B rotation IPAF driving licence type Power to platform Generator |
|--|--|---|--|

Optional extras

- | | | | |
|---|---|--|---|
| <ul style="list-style-type: none"> SkySiren® SkySiren® PCS SkySentry® SkyRak® | <ul style="list-style-type: none"> SkyRakPlus® SkyRakBoom® SkyRakMulti™ SkyTel™ | <ul style="list-style-type: none"> SkyRakEdge™ SkyShield™ SkyScreen™ Material handling attachments | <ul style="list-style-type: none"> Generator Camera pod Circular camera cage Wendy lighting frame |
|---|---|--|---|

*The number refers to indoor or outdoor uses. Call us for details.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.