
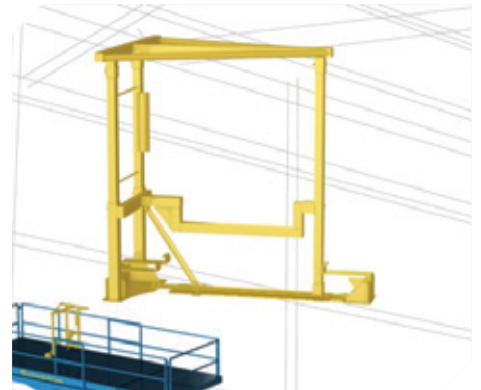


# SkyRakPlus®

Material Handling Attachment

SkyRakPlus® is a lightweight material handling attachment designed to carry a wide range of materials on large scissor Mobile Elevating Work Platforms (MEWPs).

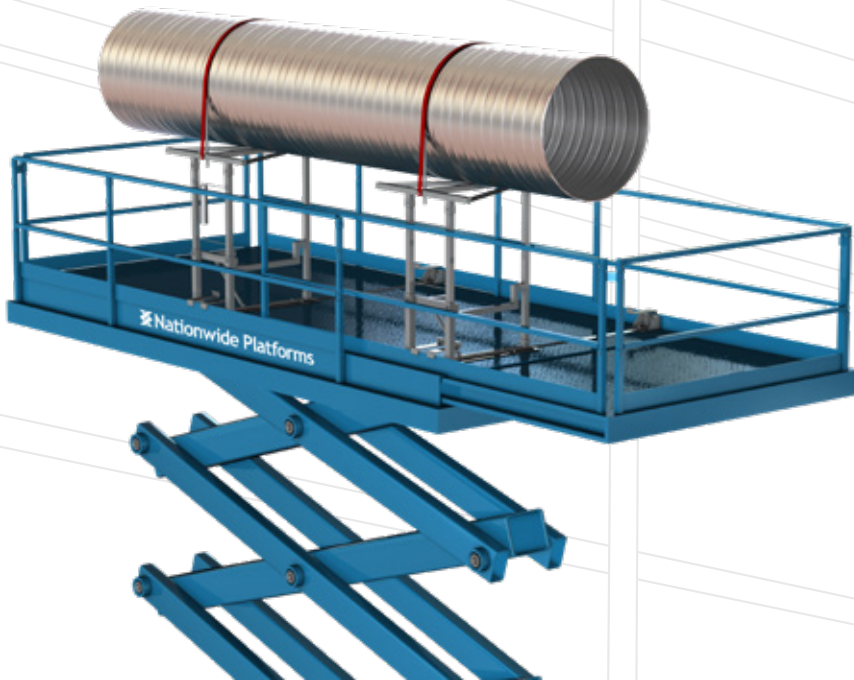

## Features

- Holds materials securely
- Removes material weight from handrails
- Materials held close to working area

## Benefits

- Reduces risk of materials falling from height
- Reduces handrail damage
- Complies with HSE regulations
- Improves productivity and reduces manual handling
- Clear deck

## Compliance with guidance

When installing materials from MEWPs, the use of well-designed Material Handling Attachments (MHAs) such as SkyRakPlus® should help MEWP users to satisfy the following:

- i. PUWER - requires that the work equipment provided is “suitable for use”.
- ii. LOLER - requires that lifting equipment (any equipment... including accessories ... used at work for lifting or lowering loads) is sufficiently strong and stable, positioned or installed to prevent the risk of injury and visibly marked for its safe use (SWLs etc). Evidence of a thorough examination must be provided.
- iii. Industry Guidance - HSE information sheet CIS58 “The Selection and Management of MEWPs” states that an “appropriate material handing attachment” should be considered to “reduce the risk of overturning and remove the need to balance materials on the MEWPs handrails and minimise the risk of injury due to manual handling”.



## MEWP Compatibility

SkyRak® is compatible with the following MEWP models:

- Genie GS33, GS43, GS53
- Liftlux LL20, SL245, LL26, SL320
- SkyJack 92/41, 92/50
- Liftlux LL17

## SkyRak® Capability

- SWL SkyRakPlus® = 600kg
- Do not exceed SWL of underlying MEWP (weight of SkyRakPlus® = 150kg)
- Max height of materials in supporting “heads” = 40cm
- Max length of materials - user-defined following a specific risk assessment.
- Wind - if working in wind, additional restrictions apply:
- Max persons in the MEWP basket = 2
- Max wind speed = 6 m/s
- Max surface area of materials being installed - refer to table in Operating Manual

Please refer to SkyRakPlus® users operating manual for full details and for suggested operating procedure, which can be used to help plan a detailed method statement.